


GM2E 315 M 4b



3-Phase 400 V (Δ) 50 Hz

- Duty Type : S1
- Degree of protection : IP 55 (TEFC)
- Insulation class : F (155 °C)
- Temp rise : Class B (80K)
- Mounting Design : B3

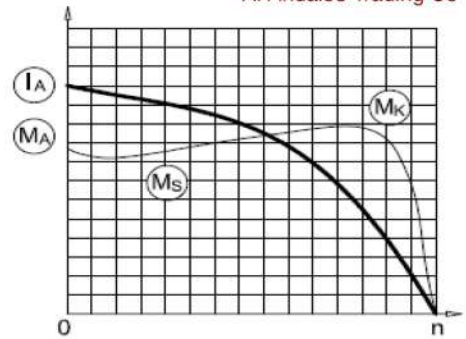

ELECTRICAL DESIGN

Direct On Line

Rated output (kW) : 160

Speed (rpm) : 1485

Rated current (A) : 280

Torque – Mn (Nm) : 1029

Cos φ : 0.87

	4/4	3/4	1/2
Efficiency %	: 95.0	94.9	94

Moment of inertia J (kgm)² : 2.7

Locked rotor Current – Ia (A) : 1960

Ia / In : 7.0

Locked rotor Torque – Ma (Nm) : 2367

Ma / Mn : 2.3

Y / Δ Starting

Locked rotor Current – Ia (A) : 644

Ia / In : 2.3

Locked rotor Torque – Ma (Nm) : 720

Ma / Mn : 0.7

Breakdown Torque – Mk (Nm) : 2675

Mk / Mn : 2.6

MECHANICAL DESIGN

- Frame : Cast Iron
- End shields : Cast Iron
- Cooling fan : Plastic
- Terminal box : Aluminium
- Cable gland : Pg 48
- No of cable glands : 2

Bearing Arrangement

Standard design

Drive End

6318 C3

Non Drive End

6318 C3

Reinforced design


NU 318 E

6318 C3

Noise Level (dB-A) : 74

Paint : RAL 7031- Grey

Approximate weight (kg) : 882

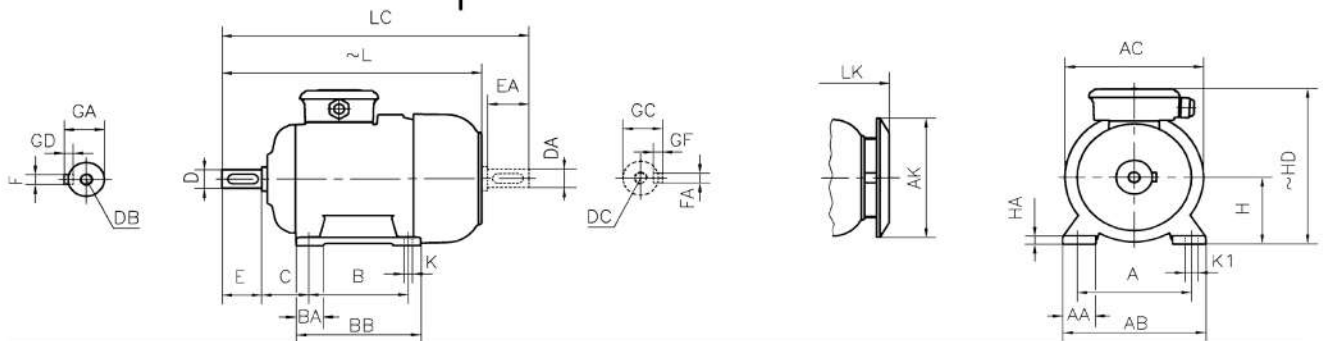

DIMENSIONS

Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6

H	HD	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L	LC	LK	C	E	EA	DB	DC	ØD	ØDA	GA	GC	FxGD	FAXGF
315	825	50	508	125	620	614	51	28	-	-	457	115	166	550	1150	1330	1227	216	170	M20	85	90	22X14					

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.

contact:

Mob:00201022621584/00201092425789

Email:info@andalos-trading.com

website:www.andalos-trading.com

Egypt-Giza-of October City

Lelat Alqader-Almaged Center