


GM 200 L 6a



3-Phase 400 V (Δ) 50 Hz

- Duty Type : S1
- Degree of protection : IP 55 (TEFC)
- Insulation class : F (155 °C)
- Temp rise : Class B (80K)
- Mounting Design : B3

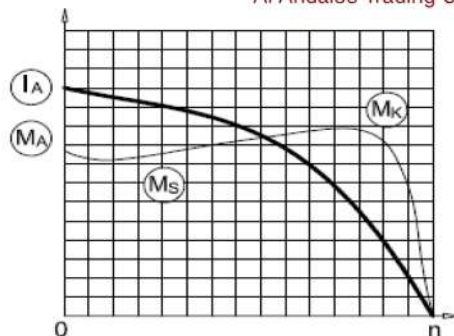

ELECTRICAL DESIGN

Direct On Line


Rated output (kW) : 18.5	Locked rotor Current – Ia (A) : 256
Speed (rpm) : 970	Ia / In : 7.0
Rated current (A) : 36.5	Locked rotor Torque – Ma (Nm) : 455
	Ma / Mn : 2.5
Y / Δ Starting	
Torque – Mn (Nm) : 182	Locked rotor Current – Ia (A) : 84
	Ia / In : 2.3
Cos φ : 0.81	Locked rotor Torque – Ma (Nm) : 146
Efficiency % : 90.4 (4/4) 90.4 (3/4) 87.7 (1/2)	Ma / Mn : 0.8
Moment of inertia J (kgm) ² : 0.21	Breakdown Torque – Mk (Nm) : 546
	Mk / Mn : 3.0

MECHANICAL DESIGN

- Frame : Cast Iron
- End shields : Cast Iron
- Cooling fan : Plastic
- Terminal box : Aluminium
- Cable gland : Pg 36
- No of cable glands : 2

Bearing Arrangement

	Drive End	Non Drive End
Standard design	6312 ZZ C3	6212 ZZ C3
Reinforced design	NU 312 E	6312 C3
Noise Level (dB-A)	: 61	
Paint	: RAL 7031- Grey	
Approximate weight (kg)	: 202	

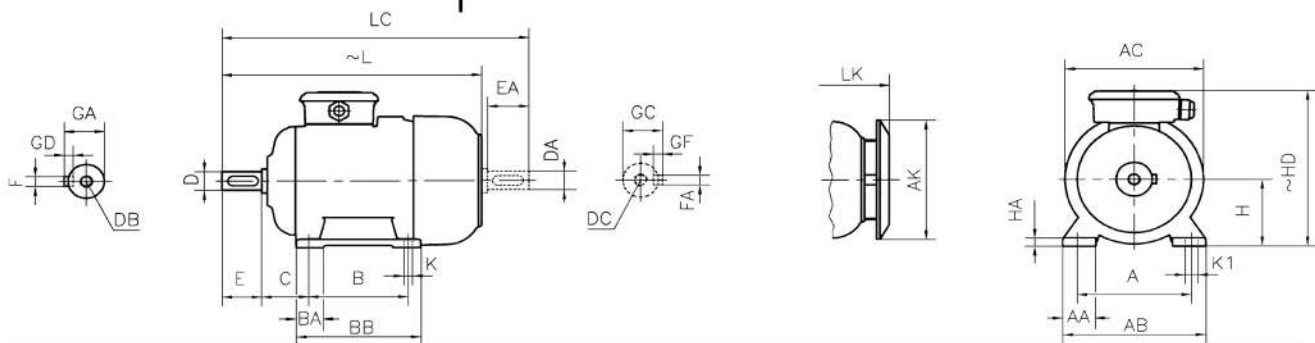

DIMENSIONS

Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6

H	HD	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L	LC	LK	C	E	EA	DB	DC	ØD	ØDA	GA	GC	FxGD	FAXGF
200	477	26	318	80	398	390	370	19	-	305	-	68	-	355	747	865	803	133	110	M20	M20	55	55	59	59	16X10	16X10	

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.

contact:

Mob:00201022621584/00201092425789

Email:info@andalos-trading.com

website:www.andalos-trading.com

Egypt-Giza-of October City

Lelat Alqader-Almaged Center